
Nautique™

Seating Capacity	7 Adults	
Dimensions	83 1/4" x 83 1/4" x 35 1/2"	A A
	(211 cm x 211 cm x 90 cm)	10 0 20
Corner Radius		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Drv Weight	725 lbs (329 ka)	6 6
Filled Weight (Average Fill)	3,430 lbs (1,556 kg)	
Water Capacity (Average Fill)	370 US gallons (1,401 Liters)	20
Shipping Weight	725 lbs (329 kg)	
Export Shipping Weight:	775 lbs (352 kg)	a b
Electronic Controls	D1 Hub [™] LCD full color control panel; access to	
	control jets, temperature, settings and mainte-	A
	nance schedule	
	North America (60 Hz): 2-Speed, 4.0 HP break,	· · ·
	2.5 HP continuous, 48 Frame	
Export (50 Hz):	1-Speed, 2.0 HP continuous	
	North America (60 Hz): 1-Speed, 3.6 HP break, 2.5	Optional
	HP continuous, 48 Frame 1-Speed, 2.0 HP continuous	-
Export (50 Hz):	1-Speed, 2.0 HP continuous	escutcheon jets
Circulation Pump	Yes	
Fountain Pump	Yes	
Filtration (factory default)	24/7 Filtration (Purge Cycles 2 x 10 minutes)	
Total VCR Jets		nol 4 Mini Otoma Datata
	1 Pillow Mini Rotator, 2 Pillow Cluster Shower Direction	nai, 4 Mini Storm Rotator
Seat 2 Jets		nal 2 Mini Ctarm Datatar
	1 Pillow Mini Rotator, 2 Pillow Cluster Shower Direction	nai, 3 Mini Storm Rotator,
Seat 4 Jets	2 Mini Storm Directional, 1 Power Storm Dual Rotator	
	1 Pillow Mini Rotator, 2 Pillow Cluster Shower Direction	nal 4 Power Storm Potator
Soat 6 lots	2 Power Storm Directional 1 Pillow Mini Rotator, 2 Pillow Cluster Shower Direction	nal 2 Euro Cluster Storm
	Directional, 2 Euro Cluster Storm Rotator	nai, 2 Euro Cluster Storm
Footwell (7)	1 Typhoon, 4 Euro Cluster Storm Directional	
Massage Selectors		
	Tactile Therapy, Spa Status Light, 4 Flex Therapy Pillo	w Aux Control
Water Management System	UltraPure System; Two 75 ft filter cartridge; 8" Weir	w, Aux Control
LED Lighting		
Optional		
Synthetic Cabinet Colors	Adobe Tan, Stoneridge Grey, Mayan Brown	
	Driftwood, Cherry, Summer Pine, Vintage Cedar, Midni	ight Maple
Acrylic Colors	Moonstone, UltraLife, Sand, Sunstone, Smoked Marble	e, Blue Topaz, Gray Marble,
•	Desert Stone	
Headrests		
	Fountain with independent flow rate (on or off) adjustm	nent; powered by the foun-
	tain pump	· · ·
Heater	2.1, 3.4, 5.5 kW	
Export (50Hz)		
Electrical Requirements:	North America (60 Hz): 240 VAC@30A, 40A or 50A	
	Export (50 Hz): 230 VAC@1x16A, 1x32A, 2x16A, 3x	
	circuit breaker to comply with local electrical code	s. Certain countries may
	require dual power inputs	
Warranty*	North America (60 Hz): Lifetime for UltraLife Shell Surf	
	Shell Surface, 5 Years Plumbing, 5 Years Equipment a	
	EnviroTect Cabinet, 7 Years for Terracina Cabinet, 1 Year Water Purification	
	System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year	
	Stereo;	7 Veene Aemilie Chell
	Export (50 Hz): 10 Years for UltraLife Shell Surface	
	Surface, 5 Years Plumbing, 5 Years Equipment and Controls, 5 Years for EnviroTect Cabinet, 2 Years for Terracina Cabinet, 1 Year Water Purification	
	System, 2 Years for Jet Insert, 1 Year for Jet Escut	
	1 Year Stereo	oneon, 2 i cais Ligilis,
Audio System (Ontional)	Fully Integrated Stereo System with Bluetooth capabili	ty 4 premium speakers and
	a subwoofer	ity, + promum speakers and
Wi-Fi (Optional)		
*(See Warranty Document for Specific Det	tails)	

*(See Warranty Document for Specific Details)

Nautique

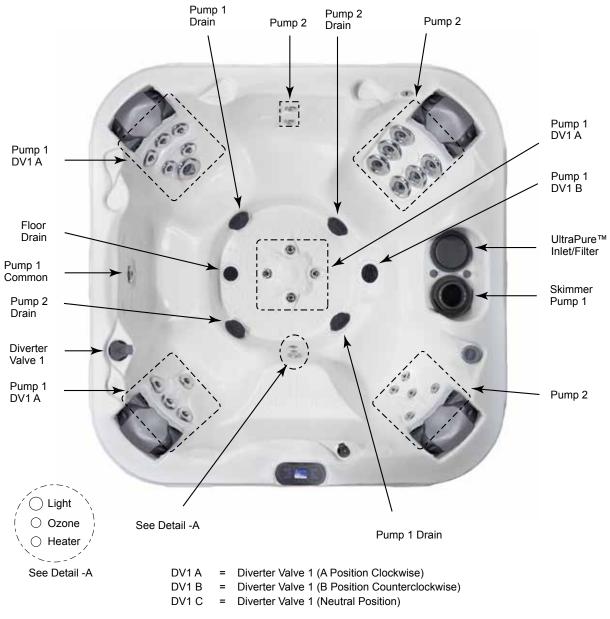

Massage Selector Diagram

Spa Operation Subject to Change without Notice

Seat Depths

1 = 27.00" (68.58 cm) 2 = 25.00" (63.50 cm) 3 = 29.00" (73.66 cm) 4 = 25.50" (64.77 cm) 5 = 29.00" (73.66 cm) 6 = 26.50" (67.31 cm)


7 = 15.50" (39.37 cm) 8 = 31.00" (78.74 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance ± 0.5" (1.27 cm).



Nautique


Jet Designation

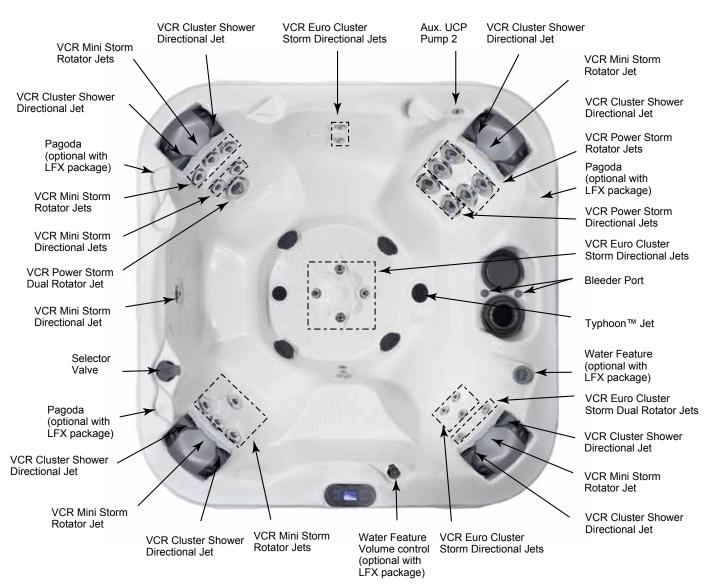

Dimensions/Operation/Specifications are Subject to Change Without Notice



Nautique

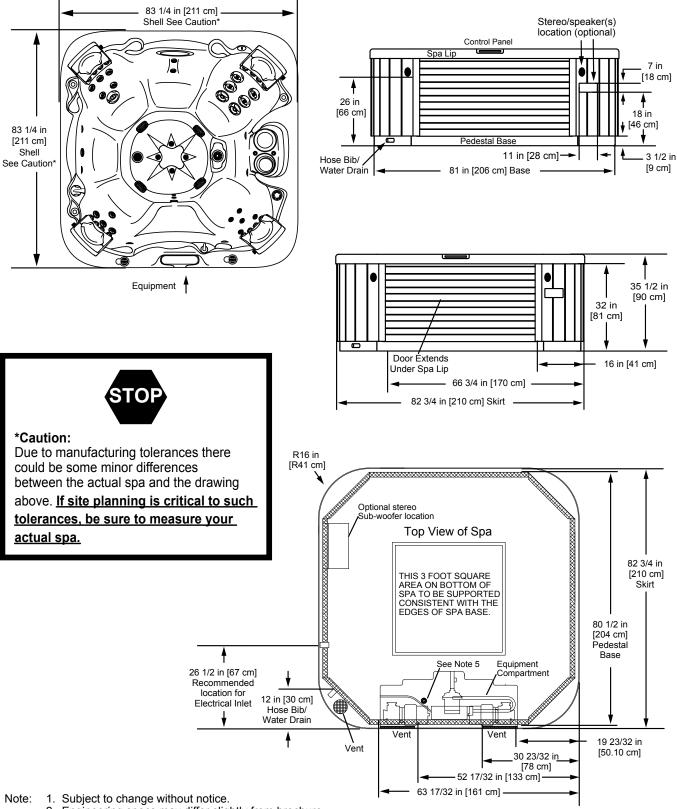

- 2. Engineering specs may differ slightly from brochure.
- 3. For E-Z lifter installation allow 18" (45.7cm) clearances on the backside of the spa.
- 4. Alternative cabinets may add significant weight. Ask your dealer for exact details.

 This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa. Be careful not to puncture a plumbing line inside the equipment compartment (drill from the inside compartment out).

Dimensions/Specifications are Subject to Change Without Notice (Tolerance ± 0.5" [1.27 cm]).